FYREBX T3 Heavy Duty
MANUFACTURER SPECIFICATIONS
Updated June 2026

Description:
FYREBX T3 HD is a patented compact track loader skid steer attachment that quickly deploys 300 gallons of water across terrain that many trailers and other equipment are unable to reach. It exceeds the current utility fire safety requirements for fuel reduction.

Specs (as shown in photos - includes add-ons):
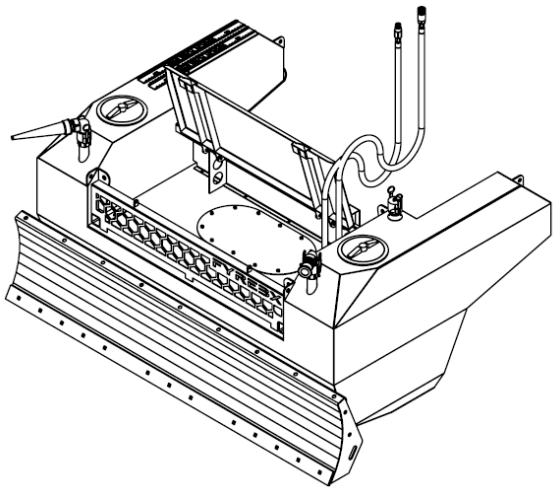
- **Volume:** 300 Gallons (1,136 Liters) of water / water-soluble product.
- **Outer Dimensions Approx:** 83″ wide, 41″ tall, 61″ deep (211 cm wide x 104 cm tall x 155 cm deep).
- **Weight:** Approx 850 lbs (386 kg) Empty. 3,200 lbs (1,497 kg) Full.
- **Compatibility:** Attaches to all compact track loaders 7,500 lbs (3402 kg) or more.
- **Seeding:** With Hydroseed **LANDBX Upgrade**. Pellet hydro-mulch material only.
- **Jet Agitation:** Circulation up to 250 gallons (946 Liters) per minute.
- **Dispersal:** From nozzle(s), hose, or monitor gun (Monitor gun **not** included in base model).
- **Air-Aspirated Nozzle:** Will produce 10:1 expansion = 3,000 gallons (11,356 Liters) of foam.
- **Submerged Hydraulic Water Pump:** Water flow rate range: 1 – 250 gpm (3.8-946 lpm) depending on hydraulic flow & nozzle type. Pressure Range: 40-145 psi (2.8-8.1 Bar) depending on hydraulic flow and nozzle type. Can be increased to 150 psi with a specialized pump (10.3 Bar). See Owner's Manual for the chart.
- **Hydraulic Flow Control:** can safely be operated from #5 (8 gpm/30.3 lpm) to #7 (10 gpm/38 lpm) on the flow control to achieve desired water psi and gpm.
- **Hydraulic Flow:** Compact Track Loader standard hydraulic flow required.
- **Drafting Capability:** Draft fill using Hider Axillary Pump.
- **Plumbing:** All plumbing **NPT or NST.** Two Accessory receivers: 2".
- **Tank Construction:** Welded from 10, 12, and 14-gauge steel (Approx. 3.4 mm to 1.9 mm thickness).
- **Baffles:** One (1) effective long and two (2) transverse.
- **Interior Finish:** 3M Scotch Coat – Cathodic Protection.
- **Exterior Finish:** Durable powder-coated paint.
- **Compact track loader attachment plate:** 1/4" (6.35 mm) Steel rated at 30,000 lbs.
- **Forklift skids:** 1/4 inch (6.35mm) steel.
- **Lift Points:** Four (4) lift points for helicopter or crane: rated to 6000 psi/hook 24K psi total.
- **Multiple accessories and customizations available**.