FYREBX®

FYREBX T4 HEAVY DUTY
MANUFACTURER SPECIFICATIONS
Updated October 2026

Description:
FYREBX T4 HD is a patented compact track loader skid steer attachment that quickly deploys 405 gallons of water across terrain that many trailers and other equipment are unable to reach. It exceeds the current utility fire safety requirements for fuel reduction.

Specs:

- **Volume:** 405 Gallons (1,533 Liters) of water / water-soluble product.
- **Outer Dimensions:** 82.75″ wide, 40.5″ tall, 61″ deep (210.2 cm wide x 102.9 cm tall x 61 cm deep).
- **Weight:** Approx 950 lbs. (431 kg) Empty. 3,300 lbs. (1,497 kg) Full.
- **Compatibility:** Attaches to all **compact** track loaders 9,500 lbs (4,309 kg) or more.
- **Seeding:** With Hydroseed LANDBX Upgrade. Pellet hydro-mulch material only.
- **Jet Agitation:** Circulation up to 250 gallons (946 Liters) per minute.
- **Dispersal:** From nozzle(s), hose, or monitor gun (Monitor gun **not** included in base model).
- **Air-Aspirated Nozzle:** Will produce 10:1 expansion = 4,000 gallons (11,356 Liters) of foam.
- **Submerged Hydraulic Water Pump:** Water flow rate range: 1 – 250 gpm (3.8-946 lpm) depending on hydraulic flow & nozzle type. Pressure Range: 40-145 psi (2.8-8.1 Bar) depending on hydraulic flow and nozzle type. Can be increased to 150 psi with specialized pump (10.3 Bar). See Owner's Manual for the chart.
- **Hydraulic Flow Control:** can safely be operated from #5 (8 gpm/30.3 lpm) to #7 (10 gpm/38 lpm) on the flow control to achieve desired water psi and gpm.
- **Hydraulic Flow:** Compact Track Loader standard hydraulic flow required.
- **Drafting Capability:** Draft fill using Hider Axillary Pump.
- **Plumbing:** All plumbing **NPT or NST.** Two Accessory receivers: 2".
- **Tank Construction:** Welded from 10, 12, and 14-gauge steel (Approx. 3.4 mm to 1.9 mm thickness).
- **Baffles:** One (1) effective long and two (2) transverse.
- **Interior Finish:** 3M Scotch Coat – Cathodic Protection.
- **Exterior Finish:** Durable powder-coated paint.
- **Compact track loader attachment plate:** 1/4" (6.35 mm) Steel rated at 30,000 lbs.
- **Forklift skids:** 1/4 inch (6.35 mm) steel.
- **Lift Points:** Four (4) lift points for helicopter or crane: rated to 6000 psi/hook 24K psi total.
- **Multiple attachments and customizations available**.

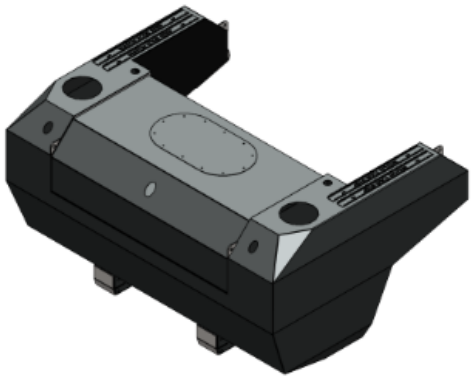

www.fyrebx.com info@fyrebx.com +1-530-255-4431