FYREBX®

FYREBX T4 Severe Duty
MANUFACTURER SPECIFICATIONS
Updated June 2026

Description:
FYREBX T4SD is a patented compact track loader skid steer attachment that quickly deploys 410 gallons of water across terrain that many trailers and other equipment are unable to reach. It exceeds the current utility fire safety requirements for fuel reduction.

Specs:

- **Volume:** 410 Gallons (1,552 Liters) of water / water-soluble product.
- **Outer Dimensions:** 96″ wide x 48″ tall x 100″ deep (244 cm wide x 157 cm tall x 269 cm deep).
- **Weight:** Approx 1,240 lbs (563 kg) Empty. 4,660 lbs (2,114 kg) Full.
- **Compatibility:** Attaches to all **compact** track loaders 11,500 lbs (5,216 kg) or more.
- **Jet Agitation:** Circulation up to 250 gallons (946 Liters) per minute.
- **Dispersal:** From nozzle(s), hose, or monitor gun (Monitor gun **not** included)
- **Air-Aspirated Nozzle:** Will produce 10:1 expansion = 4,100 gallons (15,520 Liters) of foam.
- **Submerged Hydraulic Water Pump:** Water flow rate range: 1 – 250 gpm (3.8-946 lpm) depending on hydraulic flow & nozzle type. Pressure Range: 40-145 psi (2.8-8.1 Bar) depending on hydraulic flow and nozzle type. Can be increased to 150 psi with a specialized pump (10.3 Bar). See Owner's Manual for the chart.
- **Hydraulic Flow Control:** can be safely operated from #5 (8 gpm/30.3 lpm) to #7 (10 gpm/38 lpm) on the flow control to achieve desired water psi and gpm.
- **Hydraulic water pump:** Flow rate 5 gpm to 250 gpm (19 - 946 lpm) of water.
- **Hydraulic Flow:** Compact Track Loader standard hydraulic flow required.
- **Drafting Capability:** Draft fill using Hider Axillary Pump.
- **Plumbing:** All plumbing **NPT or NST.** Two Accessory receivers: 2".
- **Tank Construction:** Welded from 10 gauge to 5/16" mild steel.
- **Baffles:** One (1) effective long and two (2) transverse.
- **Interior Finish:** 3M Scotch Coat – Cathodic Protection.
- **Exterior Finish:** Durable powder-coated paint.
- **Compact track loader attachment plate:** 1/4" (6.35 mm) Steel rated at 30,000 lbs.
- **Forklift skids:** 1/4 inch (6.35mm) steel.
- **Lift Points:** Four (4) lift points for helicopter or crane: rated to 6000 psi/hook 24K psi total.
- **Multiple attachments and customizations available**.

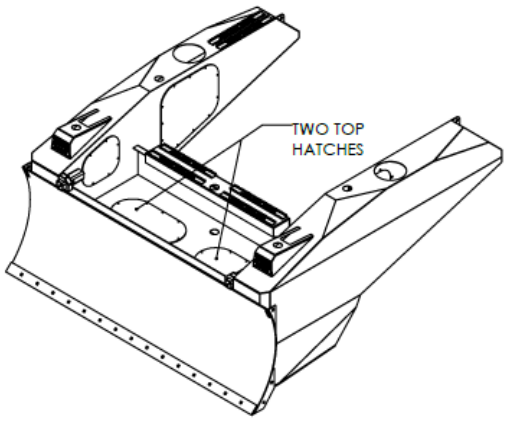

www.fyrebx.com info@fyrebx.com +1-530-255-4431