FYRE3X®

LANDBX T4
MANUFACTURER SPECIFICATIONS
Updated October 2026

Description:
405 Gallons of Hydroseeding Power for your compact track loader!
Crafted with cutting-edge technology, our hydroseeding attachment promises durability and performance, making your work faster and easier. If you're ready to experience the next level of farming innovation with FYREBX, it's time to consider the skid steer agricultural attachment that'll transform your agricultural operations in ways you never thought possible.

Specs:
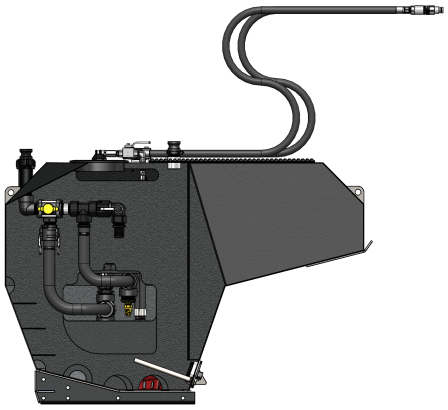
- **Volume:** 405 Gallons (1,533 Liters) of water / water-soluble product.
- **Outer Dimensions:** 82.75″ wide, 40.5″ tall, 61″ deep (210.2 cm wide x 102.9 cm tall x 61 cm deep).
- **Weight:** Approx 950 lbs. (431 kg) Empty. 4,300 lbs. (1,950 kg) Full
- **Compatibility:** Attaches to all **compact** track loaders 9,500 lbs (4,309 kg) or more.
- **Jet Agitation:** Circulation up to 250 gallons (946 Liters) per minute.
- **Seeding:** Pellet hydro-mulch material only.
- **Dispersal:** From nozzle(s), hose, or monitor gun (Monitor gun **not** included in base model).
- **Air-Aspirated Nozzle:** Will produce 10:1 expansion = 4,000 gallons (15,142 Liters) of foam.
- **Submerged Hydraulic Water Pump:** Water flow rate range: 1 – 250 gpm (3.8-946 lpm) depending on hydraulic flow & nozzle type. Pressure Range: 40-145 psi (2.8-8.1 Bar) depending on hydraulic flow and nozzle type. Can be increased to 150 psi (10.3 Bar) with a specialized pump. See Owner's Manual for the chart.
- **Hydraulic Flow Control:** can be safely operated from #5 (8 gpm/30.3 lpm) to #7 (10 gpm/38 lpm) on the flow control to achieve desired water psi and gpm.
- **Hydraulic Flow:** Compact Track Loader standard hydraulic flow required.
- **Drafting Capability:** Draft fill using Hider Auxiliary Pump.
- **Plumbing:** All plumbing **NST**. Attachment Threads: **M10**
- **Tank Construction:** Welded from 10 and 12-gauge steel (Approx. 3.4 mm to 1.9 mm thickness).
- **Baffles:** One (1) effective long and two (2) transverse.
- **Interior Finish:** 3M Scotch Coat – Cathodic Protection.
- **Exterior Finish:** Durable powder-coated paint.
- **Compact track loader attachment plate:** 1/4" (6.35 mm) Steel rated at 30,000 lbs.
- **Forklift skids:** 1/4 inch (6.35mm) steel.
- **Lift Points:** Four (4) lift points for helicopter or crane: rated to 6000 psi/hook 24K psi total.
- **Tool Accessory:** 1.5" FHT to ¾" GHT adapter.
- **Multiple attachments and customizations available**.